


# FTM-GMP

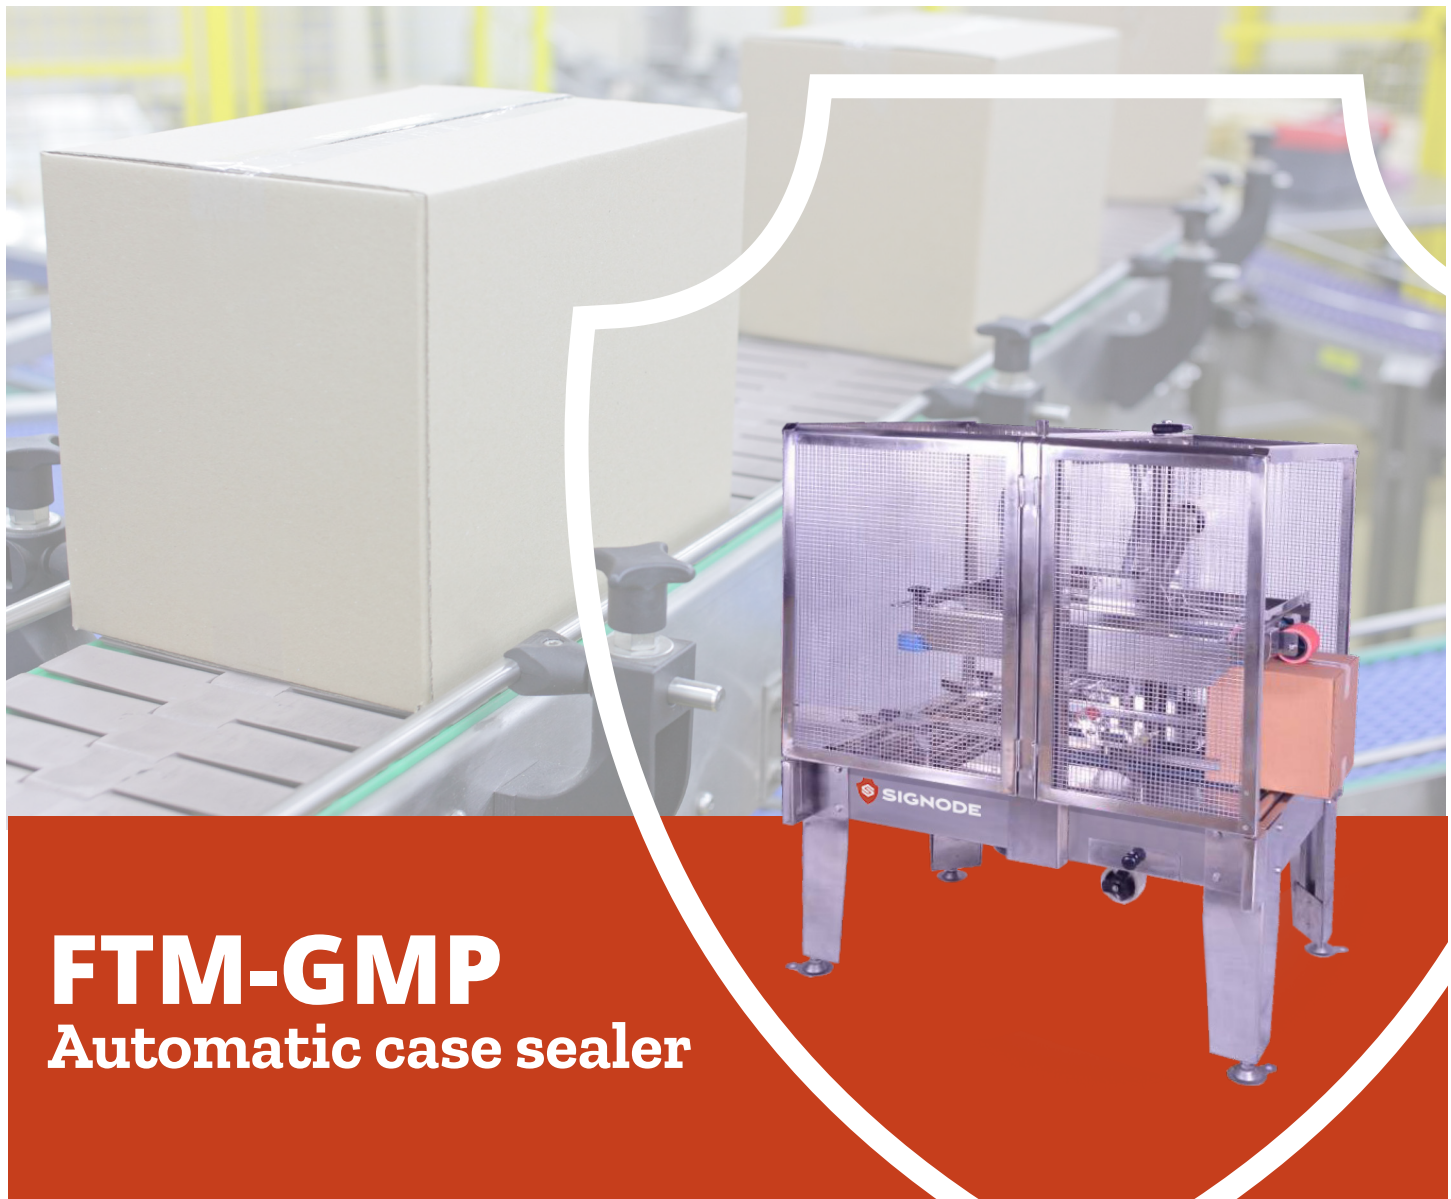

## FTM-GMP Automatic case sealer

### Productivity Focus

Performance operating speed of 20 meters per minute

### Easy Maintenance

Easy access to motors, electrical components and belts for maintenance

### Production Versatility

Wide range of supported case sizes to meet customer requirements

### Operator Friendly

Easy to operate with simple controls and intuitive tape roll replacement

# FTM-GMP

## Automatic case sealer



### Features and Benefits

- Constructed of 304 stainless steel (GMP standard)
- Auto On/Off enables power saving during idle time
- Telescopic legs for height adjustment
- Positive top and bottom drive to accomodate sealing of tall and heavy cartons, in addition to regular cartons
- Robust design for pharmaceutical and food industries
- Carton counter with electronic digital display
- Built in toolbox for ease of maintenance
- Transfer belt guards
- Belt speed of 20 meters / minute



### Utility Requirements

<b>Power</b>	230 VAC, 1 Phase, 50 Hz
<b>Consumption</b>	0.36 KW
<b>Pneumatic</b>	NA

### Case Dimensions

<b>Length</b>	150mm to Unlimited
<b>Width</b>	160mm to 550mm
<b>Height</b>	100mm to 550mm
<b>Weight</b>	5 to 50 Kg
<b>Carton Ply</b>	Minimum 3 Ply

### Technical Specifications

<b>Tape Head</b>	Standard (2.5", 3")
<b>Tape Roll Length</b>	65 M / 650 M / 1000 M
<b>Machine Length</b>	1080mm
<b>Machine Width</b>	800mm
<b>Machine Height</b>	1550mm
<b>Drive Motor</b>	0.25 HP, 2 No.
<b>Belt Speed</b>	20 m / minute
<b>Throughput</b>	Belt speed / (carton length + 280mm)

### Options

- 304 stainless steel entry conveyors (0.5 or 1.0 meter lengths)
- 304 stainless steel exit conveyors (0.5 or 1.0 meter lengths)
- Tape heads for BOPP applications