


Edge Protection

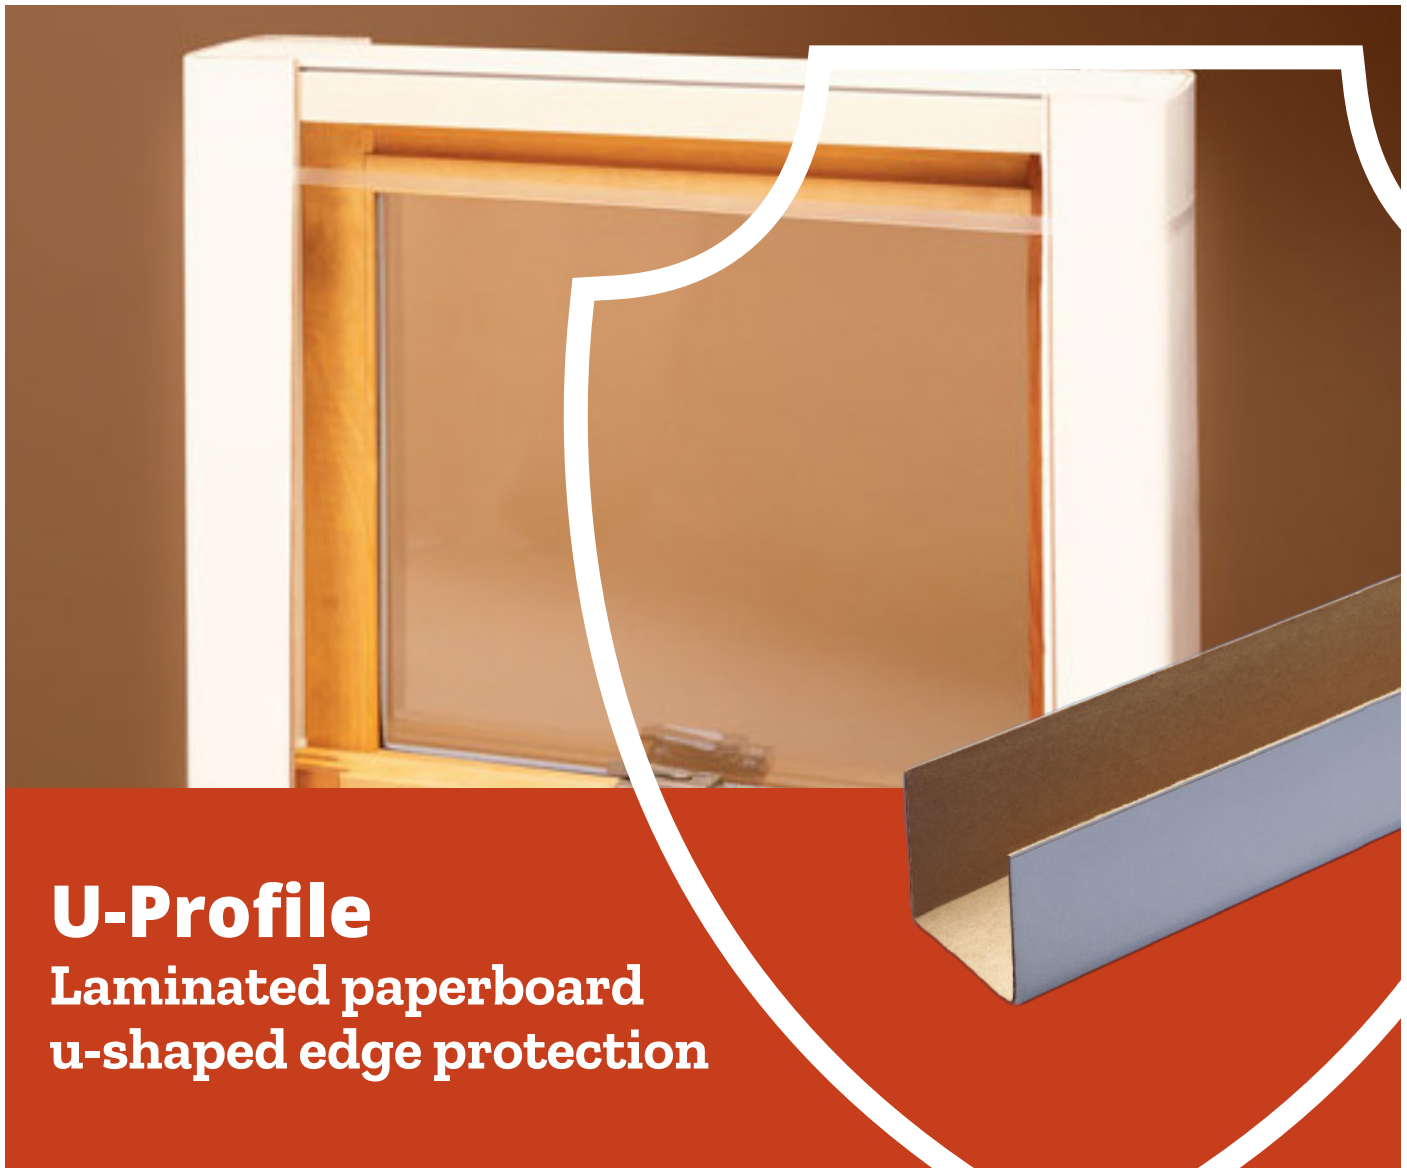

U-Profile

Laminated paperboard
u-shaped edge protection

Maximizes protection

Prevents product damage throughout the transportation cycle.

Application versatility

Optional protective coatings for different product applications.

Quick assembly

Eliminates pre-bending to save time during pack-out process.

Highly sustainable

Manufactured with recycled materials and is 100% recyclable.



U-PROFILE

Laminated paperboard u-shaped edge protection



U-Profile paper packaging is made from multiple plies of paperboard laminated together and formed into a u-shaped channel.


Used for 3-sided edge protection, it protects products from damage that can occur during transit and handling. With a smooth surface and an interior that is non-abrasive, it can be used inside or outside of a carton for product unitization and stabilization as well as provide additional beam strength to provide product stability and stacking strength.

Features and Benefits

- **Streamlines use**
Rigid u-channel construction eliminates any added assembly time, creating a simple, yet durable and more efficient way to protect products.
- **Application flexibility**
Can be tailored to individual product packaging requirements, providing package durability throughout the transportation cycle.
- **Enables branding**
It can be custom printed, enabling branding, product identification and point-of-sale merchandising.

U-Profile Corners

Created by making a notch cut into the standard U-Profile lengths allows a profile to be folded into a 90 degree angle. Ideal for doors, worktops and desks as well as more, this variant of U-Profile protects the wider corner of the product. This product supports with clipping the product in place of the packaging. Made from 100% paper and environmentally friendly glue, this product is 100% recyclable.

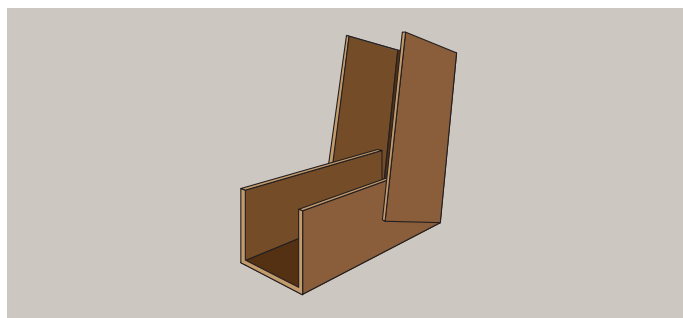

Technical Specifications

A Leg Height	Varies depending on base size
B Base Width	Available from 20 mm
C Caliper	Available from 2 mm – 3 mm
D Length	Available up to 50 mm – 6000 mm

