

HE1M-AB Unitizer



Horizontal Endsealer Strapping Machine with Automatic Strap Feed

Cost Savings

Allows for a variety of strap types to be used for product applications

Soft-Strap Application

Designed for compressable or unstable loads with smooth strap application

Low Cost of Ownership

Simple sealing head with only a few moving parts and low maintenance

Easy Integration

Having no strap chute, machines can be easily integrated into existing conveyor line



HE1M-AB Unitizer

Horizontal Endsealer Strapping Machine with Automatic Strap Feed

Model Information

Model	Strap Beams	Strap Dispensers
HE1M-AB	1	2



Machine Features and Benefits

■ Strap Application

Effortlessly enveloping the product with precision, our innovative strap application system ensures high availability, seamless positioning of straps, and exceptional throughput.

■ No Strap Arch

Few wearing parts, easily exchangeable. Direct brushless drives for head carriage, and bayonet for less service needs and longer operating life.


■ Simple Design

Designed for efficiency and durability, the sealing head has a simplistic design with minimal moving parts reducing servicing and maintenance requirements. By prioritizing simplicity, operational costs decrease while maintaining performance, seamless functionality and long-term reliability.

■ Increased Uptime


Equipped with dual strap coils per strapping line, the system extends operational efficiency with double the run length between coil changes. This innovative design increases productivity by minimizing downtime, providing uninterrupted performance for your packaging needs.

Cost Savings

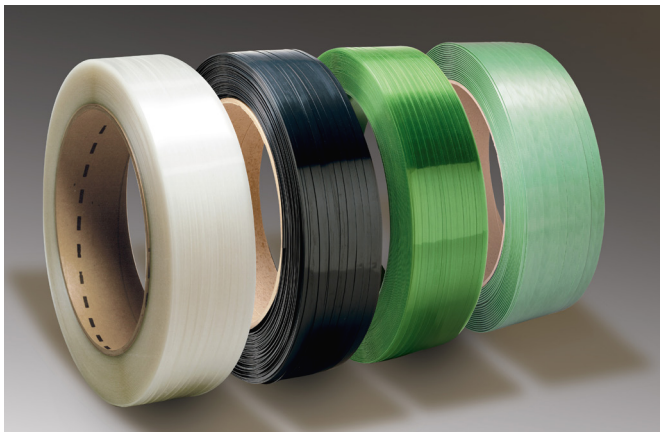

A variety of strap sizes can be used and selected for the product application, with cost savings on consumable materials.


High Throughput

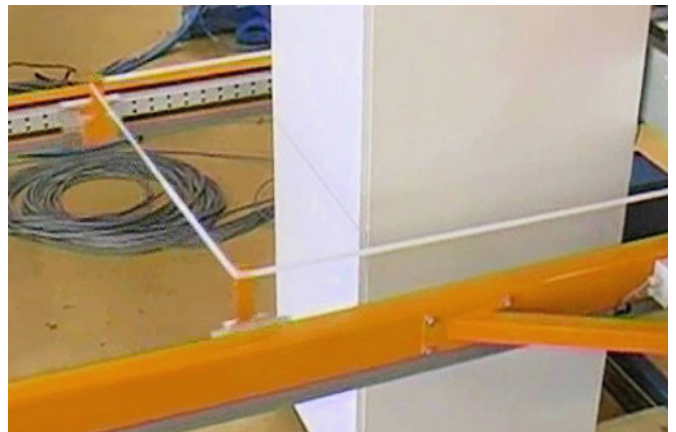

Strap is applied by the movement of the extension arm finger guides wrapping the strap around the product. Very accurate positioning of the strap placement.

Sealer Head / Features and Benefits

- High Performance**
 Having few moving parts allows the head to perform a fast 6 second cycle time.
- Modular Design**
 The sealer head consists of two major assemblies. The welding unit and the pressing unit
- Low Maintenance**
 The sealer head required no lubrication. All bearing are sealed design. occasional cleaning is all that is needed.

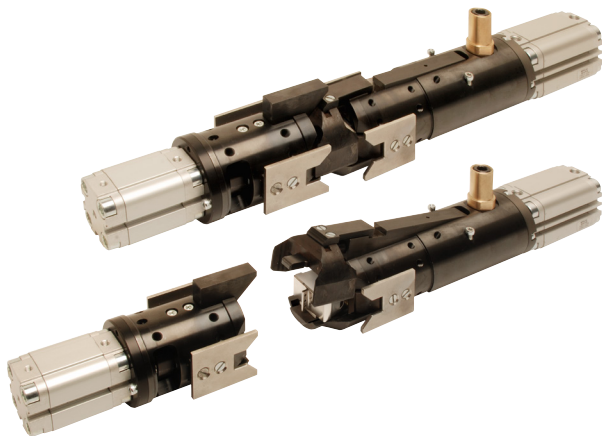

Machine Options

- Strap tension unit
- Strap end pre-signal
- PET Strapping Kit
- Motorized movement of machine
- Beam protection
- Fast Beam movement
- Head protection plate

Low Maintenance Cost



Simple sealing head with few moving parts and low maintenance operation.

Inline Strapping Integration






Endsealers can be easily integrated into existing conveyor lines. Machines use very little floorspace to operate.

HE1M-AB Unitizer

Horizontal Endsealer Strapping Machine



Machine Layout

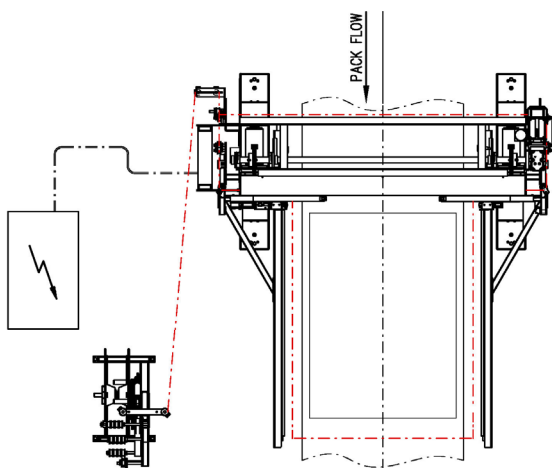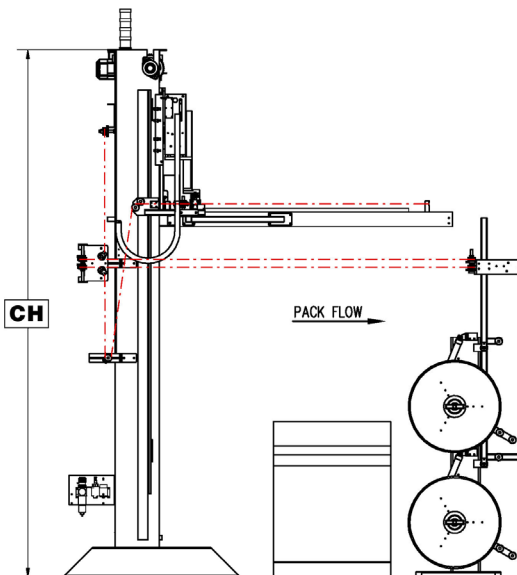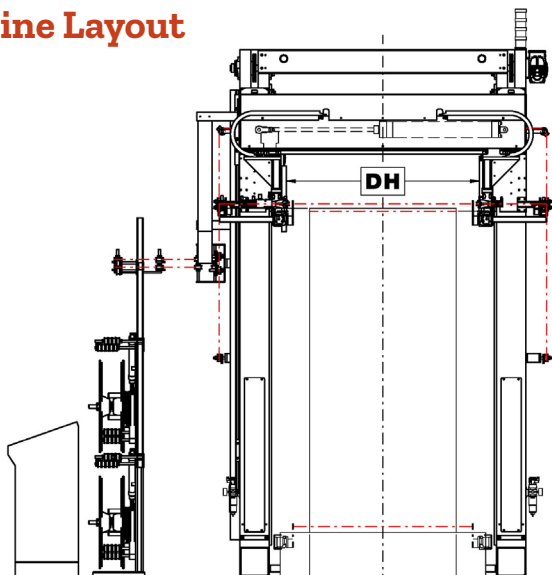

Technical Specifications

Strapping	5 -16mm Polypropylene (PP) 5 -13mm Polyester (PET)
Strap Tension	0-400 N (retained tension on product)
Strap Cycle Time	6 sec. (PP strap), 7 sec. (PET strap)
Tension Stroke	Flexible, adapted to product
Vertical Speed	3.9" (100 mm) per second Optional 11.8" (300 mm) per second
Sealing Method	Heat seal for PP strap (PET optional)
Min Strapping Height	1.6" (40 mm) above conveyor 13.8" (350 mm) above floor
Max Strapping Height	Up to 114.2" (2900 mm)
Strap End	Automatic end detection
Strap Dispenser(s)	2 per strap, flexible location
PLC Control	Simatic S7-1212C
Electrical Supply	460VAC, 3Ph, 60Hz 400VAC, 3Ph, 50Hz
Control Voltage	24 VDC
Pneumatic Supply	95 psi, 2.65 cfm (6 bar, 75 lpm)
Machine Weight	1543 to 2204 lbs (700 - 1000 kg)

Machine Layout	Distance Between Heads (DH)	Column Height (CH)	
		141.7" (3600mm)	157.5" (4000mm)
1811.021.071	35.4" (900mm)	•	•
1811.021.072	43.3" (1100mm)	•	•
1811.021.073	51.2" (1300mm)	•	•
1811.021.074	59.1" (1500mm)	•	•
1811.021.075	66.9" (1700mm)	•	•

The company reserves the right to make technical alterations without prior notification.
©2024 Signode Industrial Group LLC / ID-15014 / R-241209 / www.signode.com
For queries please contact Signode Industrial Group LLC at marketing@signode.com

