


# PNSC-2

## Pneumatic Push-Type Combination Tool for Steel Strapping

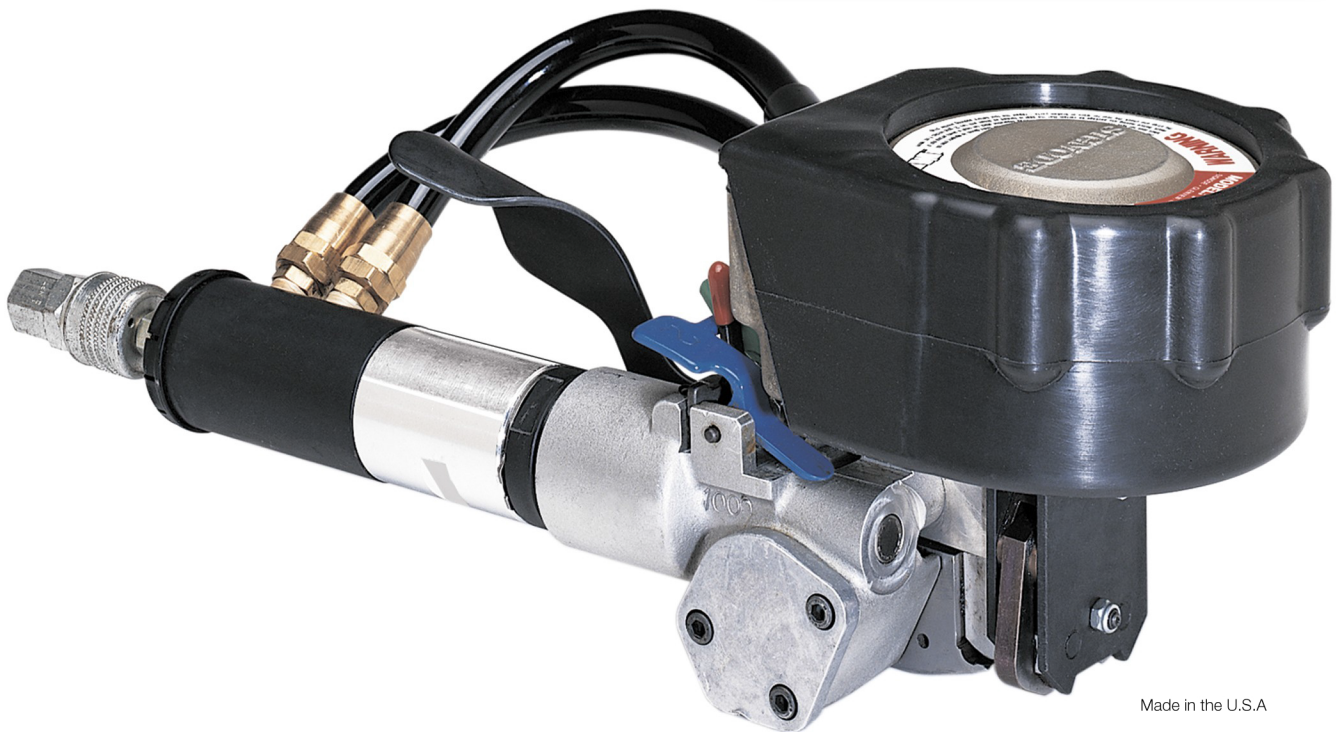

Made in the U.S.A

### Easy to operate

- Two-strap loading
- Two button operation
- Easy to remove strap after cycling

### Superior performance

- Fast cycle time
- Applies up to 700 lbs. tension\*

### Reliable

Produces a single reverse notch seal joint for maximum joint strength

### Durable

All metal and alloy parts provide long-lasting, low maintenance operation.

### Specifications

Strapping: For use on 1/2" - 3/4" x .017- .025 Apex Plus™ or Magnus® strapping.

Joint type: Single reverse notch

Weight: 9.5 lbs.

*\* Also available in a high tension model (up to 1,000 lbs. of tension) for 3/4" strapping.*



포항시 남구 섬안로 46번길 47 (괴동동)  
Tel) 054 - 280 - 0770  
Fax) 054 - 280 - 0733  
[www.signode.com/ko-kr/](http://www.signode.com/ko-kr/)